

EPSILON LX

LINEAR VENT FREE GAS FIREPLACES



LINEAR VENT FREE GAS FIREPLACES

EPSILON LX

*Epsilon LX 45 with Platinum Crushed Glass
and Optional Black Porcelain Liner*

The Epsilon LX linear vent-free gas fireplace offers a sleek opening that provides an exceptional view of the gently dancing flames and floor lighting that allows you to customize the mood. Its modern, low profile design is just right for contemporary and transitional spaces. The Epsilon LX comes complete with a multi-function remote for the ultimate in convenience and control.

STANDARD FEATURES

- ◆ Available in a 45" and 55" linear configured models
- ◆ HeatFlo™ kit or variable speed blower options available to fine tune your heating needs*
- ◆ Electronic ignition with battery backup provides continued operation in the event of a power outage
- ◆ 99.9% efficient for exceptional heating and lower operating costs
- ◆ Decorative surrounds available to complement drywall finished applications
- ◆ Standard black bezel and barrier screen
- ◆ Black painted interior standard (optional porcelain liner available)
- ◆ Platinum crushed glass media included with several optional colors available to customize the look
- ◆ Optional driftwood logs and river rocks are a perfect addition for a transitional design
- ◆ Mood enhancing floor lighting with six distinctive settings
- ◆ Multi-function remote included (IPI/CPI, thermostat, flame height, blower, lighting)
- ◆ Limited Lifetime Warranty

* HeatFlo Kit and Blower Kit options may not be installed in the same appliance

EPSILON LX Options & Accessories

Interior



*Black Painted
Interior
(Standard)*



*Black Porcelain
Liner
(Optional)*

Media



*Platinum
Crushed Glass
(Standard)*




*High-Definition Driftwood Log
Set for 55" Models*



*Reflective Black
Crushed Glass*



*High-Definition Driftwood Log
Set for 45" Models*



*Reflective Blue
Crushed Glass*



River Rock Assorted Set

Decorative Surrounds



Black Surround



Stainless Surround

Control



- Touchscreen Digital Display
- Manual On-Off & Thermostatic Modes
- 3 Flame Heights Settings
- 6 Interior Light Settings
- Weekday/Weekend Modes
- Wall Mounted Docking Station


HeatFlo™ Kit

Protect heat sensitive televisions, artwork and other decorative wall materials. No blower required, the HeatFlo™ kit works through natural convection to redirect heat from the fireplace upward through hidden ductwork and out through a sleek horizontal vent. Walls stay cooler and heat flows more evenly through the room for a comfortable fireplace experience.

- TV & Artwork can be placed above the fireplace
- Helps protect heat sensitive wall facing materials
- Improves convective heat circulation in the room
- No electricity or blower required for operation



APPLIANCE SPECIFICATIONS

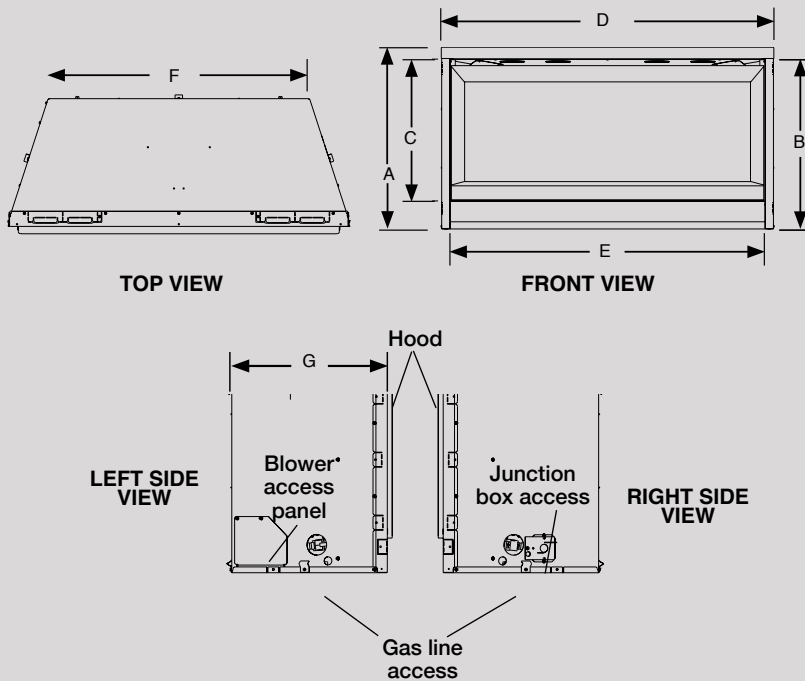

EPSILON LX

MODEL	A	B	C	D	E	F	G
45" MODELS	24-3/4"	23-1/4"	19-3/8"	45-1/2"	42-7/8"	34-3/4"	17"
55" MODELS	24-3/4"	23-1/4"	19-3/8"	55-1/2"	52-7/8"	44-3/4"	17"

FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	AFUE
EPSILON LX 45	NG	23,000-17,000	99.9%
EPSILON LX 45	LP	21,000-17,000	99.9%
EPSILON LX 55	NG	28,000-21,000	99.9%
EPSILON LX 55	LP	27,000-21,000	99.9%

IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.


Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

astria
FIREPLACES®

FRAMING SPECIFICATIONS

(Standard Installation)

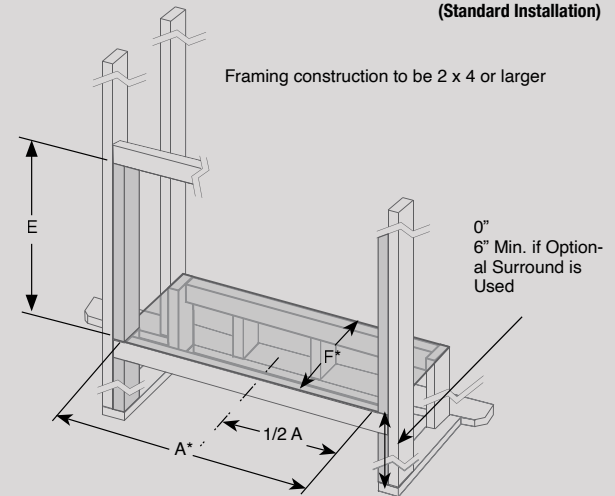

EPSILON LX

MODEL	A*	B	C	D	E	F*
45" MODELS	45-7/8"	70-3/8"	49-3/4"	35-1/4"	29"	18"
55" MODELS	55-7/8"	82-3/4"	58-1/2"	41-3/8"	29"	18"

A* Minimum opening size: addition 1/8" per side is recommended


F* For flush framing installations.

NOTE: If flush framing unit, field supplied non-combustible board will need to be used.

EPSILON LX

	45" One Sided Framing HeatFlo Kit	55" One Sided Framing HeatFlo Kit
A	45-7/8"	55-7/8"
B	18"	18"
C	29"	29"
E*	81-1/2"	81-1/2"
F*	3-1/2"	3-1/2"
G	43-1/2"	53-1/2"
H	5-1/8"	5-1/8"

Flush Wall Framing With HeatFlo™ Kit

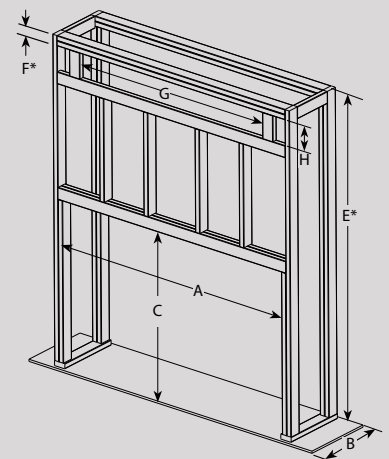

E* = Minimum height from appliance base to ceiling

F* = Minimum distance from framed opening to ceiling

Refer to Spec Sheet for complete recessed wall pocket applications and instructions.