




FIRE INSPIRED®

Hearth Products Controls Co
OUTDOOR USE ONLY


FOR COMMERCIAL AND RESIDENTIAL USE

HEARTH PRODUCTS CONTROLS
2225 LYONS RD.
MIAMISBURG, OH 45342
TOLL FREE: 877.585.9800
PHONE: 937.436.9800
www.hpcfire.com

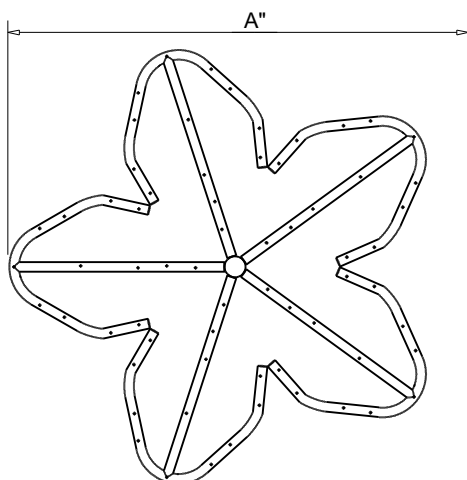

Material:

1. ALL BURNERS ARE 304 STAINLESS STEEL

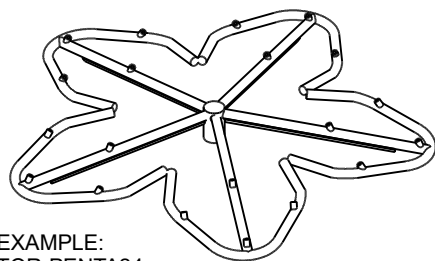


EXAMPLE:
TOR-PENTA24

MODEL NUMBER		SIZE (A")	RECOMMENDED BTU		HUB SIZE
			PENTA	TORPEDO	
TOR-	PENTA12	12"	65K	100K	1/2"
TOR-	PENTA18	18"	125K	175K	1/2"
TOR-	PENTA24	24"	200K	250K	1/2"
TOR-	PENTA30	30"	250K	300K	3/4"
TOR-	PENTA36	36"	300K	350K	3/4"
TOR-	PENTA48	48"	300K	350K	3/4"

*FOR TORPEDO BURNERS ADD TOR-

Notes:

1. FOR USE WITH FIXED PIPING SYSTEMS ONLY.
2. ENCLOSURES:
 - For Fire Pit up to 200K BTU: Required minimum 2 vents, 18 sq.in. each on opposing sides.
 - For Fire Pit Inserts above 200K BTU: Required minimum 4 vents, 18 sq.in. each on opposing sides.
- BOWLS (Copper, concrete or metal)
 - For Fire Pit inserts up to 90K: Required minimum 2 vents, 9 sq.in. each on opposing sides.
 - Or bowl to be raised above mounting surface minimum of 3/4" gap; Bowl to have a minimum of 6" diameter hole in bottom.
3. RESIDENTIAL GAS PRESSURE ONLY
 - Natural Gas: Supply Pressure: Minimum: 3.5" W.C.; Maximum: 7.0" W.C.
 - LP Gas: Supply Pressure: Minimum: 8" W.C.; Maximum: 11.0" W.C.
4. MODIFICATION OF PRODUCT WILL VOID ANY WARRANTY.
5. FOLLOW ALL MANUFACTURER INSTALLATION INSTRUCTIONS AND LOCAL CODES.
6. ALL DIMENSIONS ARE CONSIDERED TRUE AND REFLECT MANUFACTURER'S SPECIFICATIONS AS OF THE REVISION DATE.
7. DO NOT SCALE DRAWING.
8. THESE DRAWINGS ARE FOR SIZING AND PLANNING PURPOSES. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT. THE MANUFACTURER'S RESPONSIBLE FOR THE ACCURACY OF THE DRAWING.



PENTA BURNERS



REVISION DATE 7/9/2024