



Features

Compatible with the Cool Wall Advantage kit

Certain size models meet requirements for efficiency rebates

DISTINCTION UNCOMPROMISING

MULTI SIDED

DISTINCTION FULL LOAD CONTEMPORARY

D3615ST
D4815ST
D6315ST
D7215ST

SEE THROUGH
DIRECT VENT

Standard

Concealed burner with Ice fireglass

Multi-function remote control

Remote Hi-Lo flame control[†]

Micro mesh screen

Black reflective glass

Multicolor LED uplighting

Battery backup

Options

Cool Wall Advantage

Propane conversion kit

Adjustable trim kit

Fluted liners

WiFi phone app control

QUICK DIMENSIONS

	D3615ST		D4815ST		D6315ST		D7215ST	
	UNIT	FRAM.	UNIT	FRAM.	UNIT	FRAM.	UNIT	FRAM.
WIDTH	51 ⁷ / ₈	59 ³ / ₄	63 ⁷ / ₈	71 ³ / ₄	72 ⁷ / ₈	79 ¹ / ₂	87 ⁷ / ₈	95 ³ / ₄
HEIGHT	41	49 ¹⁵ / ₁₆	41	49 ¹⁵ / ₁₆	33 ³ / ₁₆	50 ³ / ₈	41	59 ³ / ₈
DEPTH	17 ³ / ₄	17 ¹¹ / ₁₆	17 ³ / ₈	17 ¹¹ / ₁₆	18 ¹ / ₂	18	17 ³ / ₄	17 ¹¹ / ₁₆
VIEWING	36 × 15 ¹ / ₂		48 × 15 ¹ / ₂		63 × 14		73 ⁷ / ₈ × 15 ¹ / ₂	

[†]30% turndown, 50% turndown for D6315

BTU LISTING

D3615*STI-2 / 35,000

D4815*STI-2 / 40,000

D6315*STI-2 / 50,000

D7215*STI-2 / 57,000

EFFICIENCY P.4. 1-15

D3615STNI-2 / 71.96%

D3615STLI-2 / 70.48%

D4815STNI-2 / 77.49%

D4815STLI-2 / 76.58%


D6315STNI-2 / 62.69%

D6315STLI-2 / 60.49%

D7215STNI-2 / 73.86%

D7215STLI-2 / 74.54%

DISTINCTION DIMENSIONS

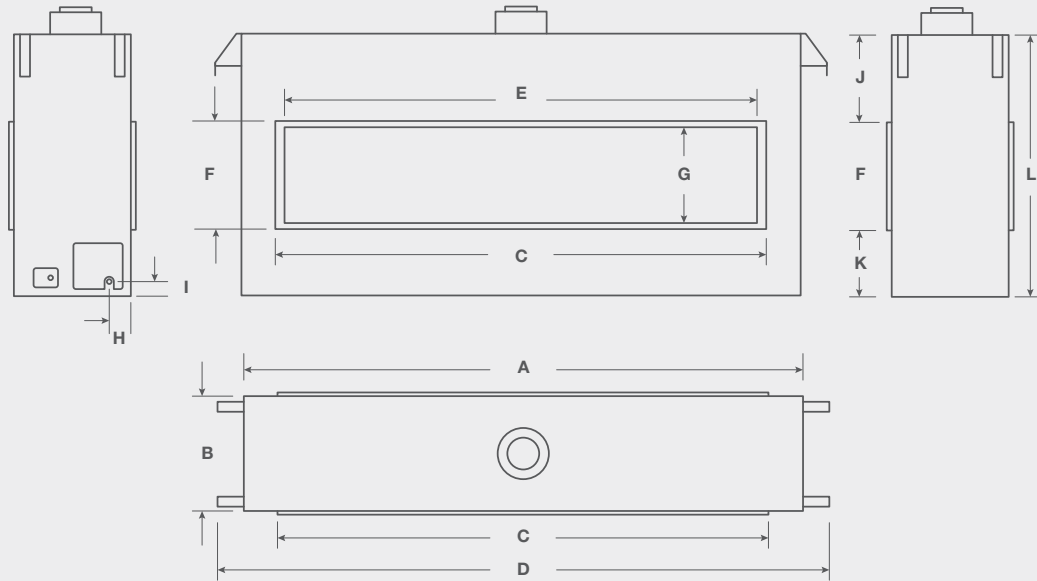

	A	B	C	D	E	F	G	H	I	J	K	L
D36ST	51 $\frac{7}{8}$	17 $\frac{3}{8}$	40 $\frac{3}{4}$	59 $\frac{3}{4}$	37 $\frac{7}{8}$	17	15 $\frac{1}{2}$	5 $\frac{1}{2}$	2 $\frac{3}{8}$	13 $\frac{3}{8}$	10 $\frac{3}{8}$	41
D48ST	63 $\frac{7}{8}$	17 $\frac{3}{8}$	52 $\frac{1}{4}$	71 $\frac{3}{4}$	49 $\frac{7}{8}$	17	15 $\frac{1}{2}$	5 $\frac{1}{2}$	2 $\frac{3}{8}$	13 $\frac{3}{8}$	10 $\frac{3}{8}$	41
D63ST	72 $\frac{7}{8}$	18 $\frac{1}{16}$	65 $\frac{9}{16}$	79 $\frac{1}{2}$	64 $\frac{1}{8}$	16 $\frac{1}{8}$	15 $\frac{7}{8}$	7	2 $\frac{1}{2}$	6	10 $\frac{7}{8}$	33 $\frac{3}{16}$
D72ST	87 $\frac{7}{8}$	17 $\frac{3}{8}$	76 $\frac{1}{4}$	95 $\frac{1}{16}$	73 $\frac{3}{8}$	17	15 $\frac{1}{2}$	5 $\frac{1}{2}$	2 $\frac{3}{8}$	13 $\frac{3}{8}$	10 $\frac{3}{8}$	41



MONTIGO / DISTINCTION / D6315ST / ICE FIREGLASS

MONTIGO / DISTINCTION / D4815ST / ICE FIREGLASS




OPTIONS & FEATURES



REMOTE⁺
RX200**



WALL REMOTE
EC1550



WIFI PHONE APP
CONTROL
SIT-WIFI⁺




TRIM KIT⁺
DT**




UPLIGHTING⁺
INCLUDED

*Standard on Distinction units

LINERS



ASH FLUTED
DBK**AFST



TUSCAN FLUTED
DBK**TFST



BLACK GLASS⁺
INCLUDED

Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED

◊


STANDARD

◊


	BTU NATURAL GAS	BTU LIQUID PROPANE	GAS SUPPLY PRESSURE NG (SHOWN IN W.C.)	GAS SUPPLY PRESSURE LP (SHOWN IN W.C.)	VENTING	CLEARANCE SIDES	CLEARANCE BACK	CLEARANCE FLOOR	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
D3615*I-2	35,000	35,000	11	13.8	5"/8" ^Δ	4	½	0	36 X 14%	HIGH TEMPERATURE	HW1157	+	◊	◊	◊	-
D4815*I-2	40,000	40,000	11	13.8	5"/8" ^Δ	4	½	0	48 X 14%	HIGH TEMPERATURE	HW1157	+	◊	◊	◊	-
D6315*I-2	50,000	50,000	11	13.8	5"/8"	3½	2	0	63½ X 14	HIGH TEMPERATURE	HW1157	+	◊	◊	◊	-
D7215*I-2	57,000	57,000	11	13.8	5"/8"	4	½	0	73¾ X 15½	HIGH TEMPERATURE	HW1157	+	◊	◊	◊	-
D3615ST*I-2	35,000	35,000	11	13.8	5"/8" ^Δ	4	½	0	36 X 14%	HIGH TEMPERATURE	HW1157	+	◊	-	◊	-
D4815ST*I-2	40,000	40,000	11	13.8	5"/8" ^Δ	4	½	0	48 X 14%	HIGH TEMPERATURE	HW1157	+	◊	-	◊	-
D6315ST*I-2	50,000	50,000	11	13.8	5"/8"	3½	2	0	63½ X 14	HIGH TEMPERATURE	HW1157	+	◊	-	◊	-
D7215ST*I-2	57,000	57,000	11	13.8	5"/8"	4	½	0	73¾ X 15½	HIGH TEMPERATURE	HW1157	+	◊	-	◊	-

ΔCan be reduced to 4"7"

DISTINCTION SINGLE SIDED FRAMING

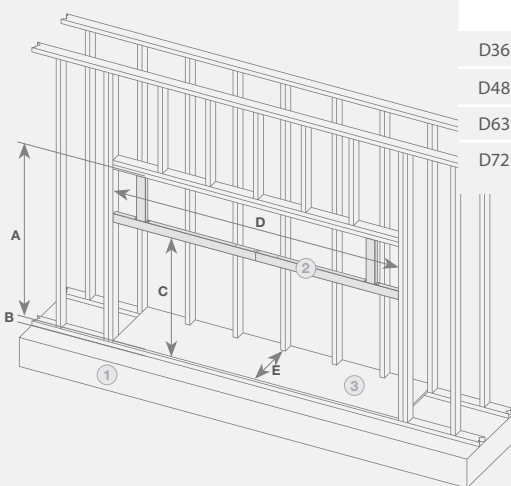

	A	B	C	D	E	F	G	H	I	J	K
D3615	49½	2¼	N/A	59¾	17½	10%	40%	24	17½	12%	53½
D4815	49½	2¼	N/A	71¾	17½	10%	52%	24	17½	12%	53½
D6315	50¾	2¼	33½	79½	18	8%	66½	24½	16½	13	54½
D7215	59¾	2¼	41½	95¾	18½	10%	76%	33½	17½	12%	63½




DISTINCTION ST FRAMING


Use single sided framing chart except for dimension "E". this measurement is from edge to edge of the platform.

	E
D3615ST	17½
D4815ST	17½
D6315ST	18¾
D7215ST	17½

COOL WALL ADVANTAGE FRAMING

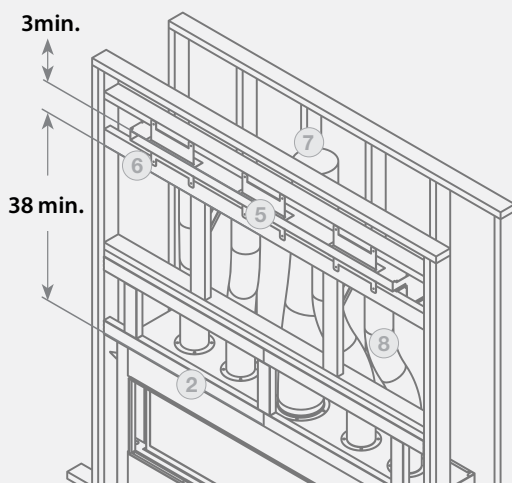

COOL WALL ADVANTAGE SIDEWALL FRAMING

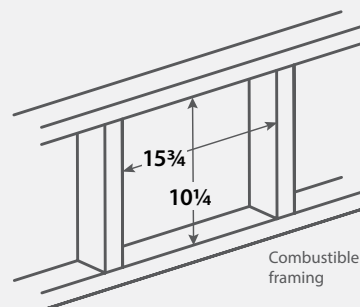

Dimensions are the same for both horizontal and vertical sidewall kits

36" size features 2 venting holes

LEGEND

1	FLOOR STRUCTURE
2	NON-COMBUSTIBLE METAL FRAMING (NOT USED ON 36, 48)
3	FIREPLACE PLATFORM
4	CONCRETE BOARD
5	COOL WALL ADVANTAGE OPENING
6	2X4 ON EDGE
7	MAIN VENT
8	5" VENTING

See through versions include two sets of non combustible framing and concrete board.

36" and 48" version does not include non combustible framing kit

Chase venting is needed for safe operation of the unit, see instruction manual for detailed instructions

Minimum distance from unit base to ceiling is 89"